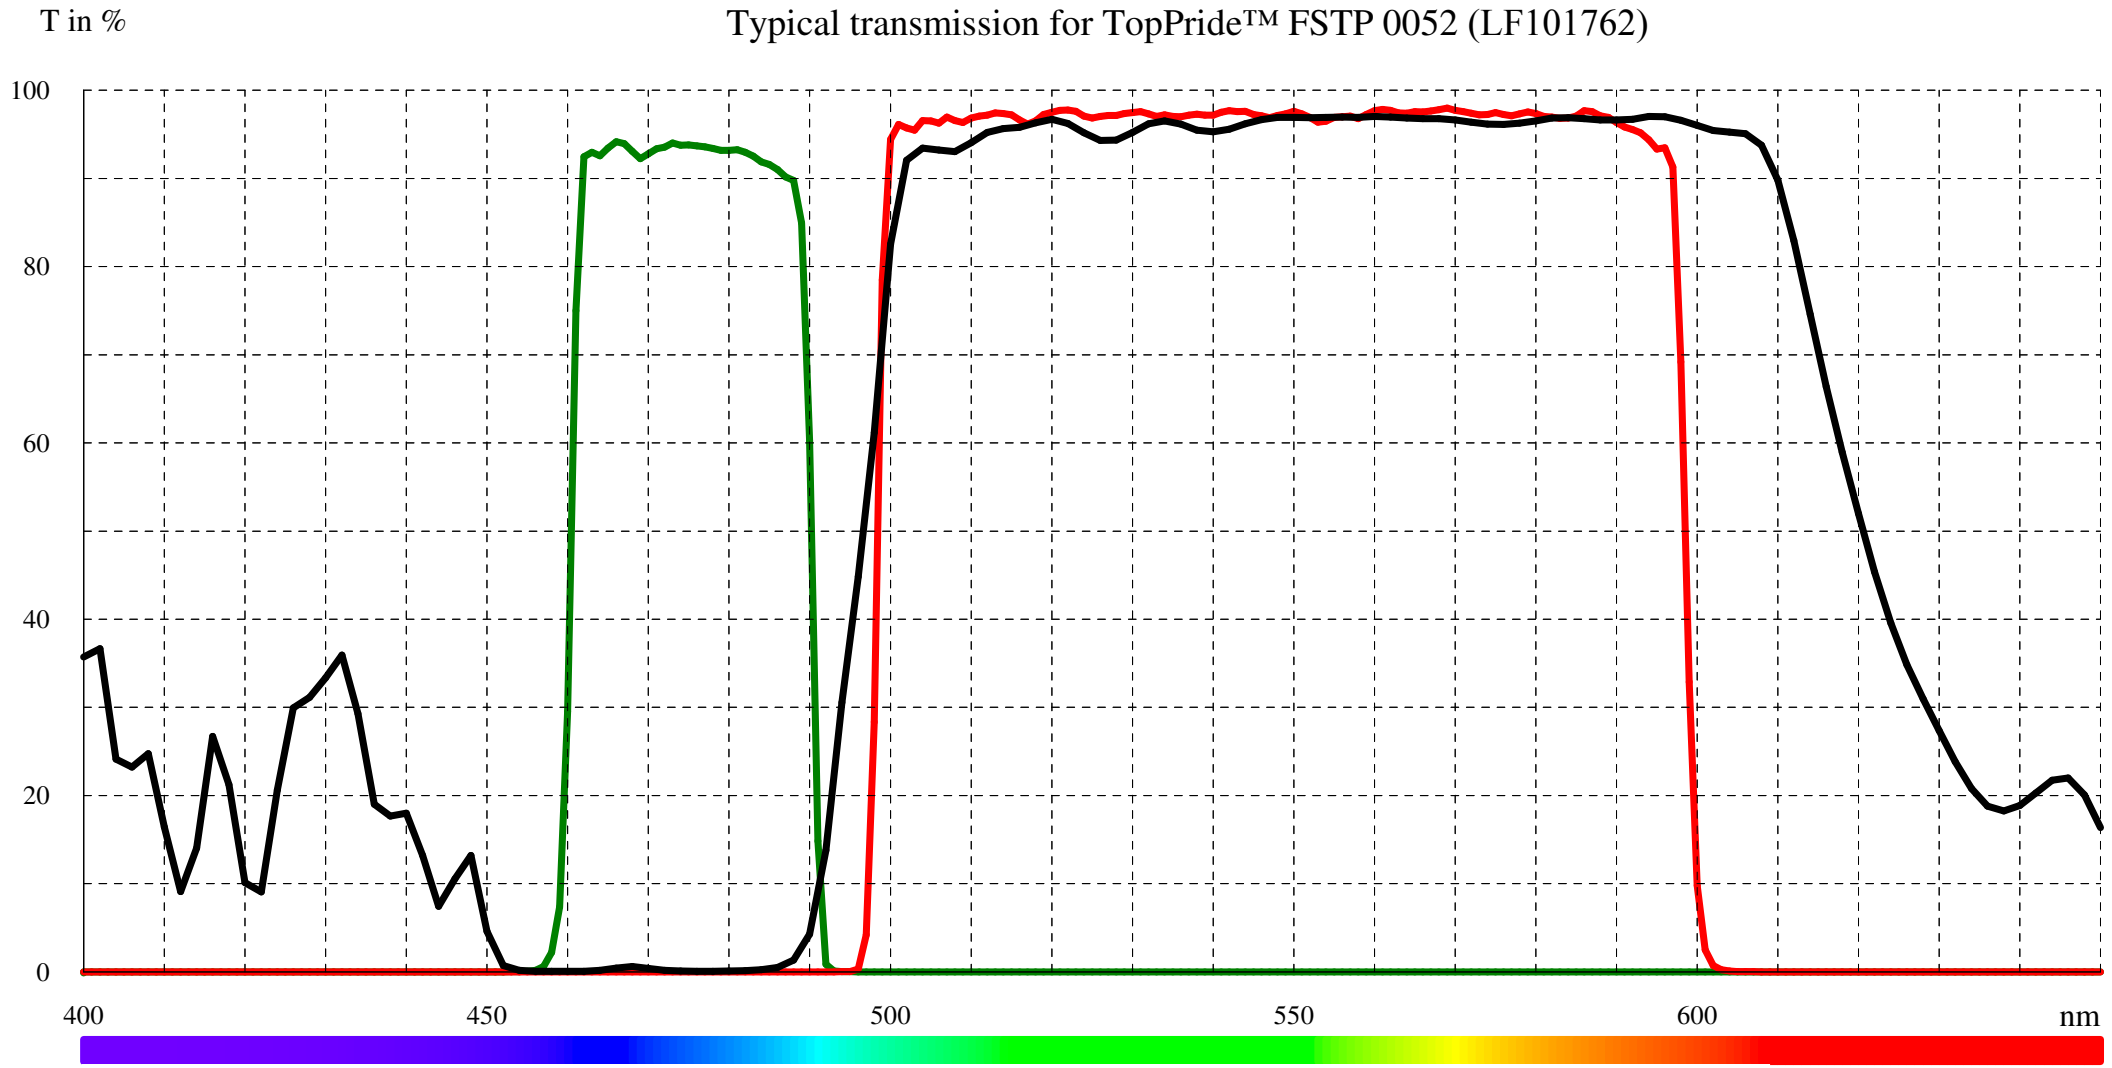

TopPride™ filtersets feature:

- Single substrate construction
- No colored glass (minimal lens effect, extreme durability and minimal auto fluorescence).
- Ultra Hard Coated filters using oxide materials
- Typical transmission of 95-98% (minimum 92%)
- The upper limit of the blocking range is 950nm to better suit modern camera based microscopes

delta
optical thin film

Delta Optical Thin Film A/S, Venlighedsvej 4, 2970 Hørsholm, Denmark Phone +45 7070 7146 e-mail: sales@deltaopticalthinfilm.com www.deltaopticalthinfilm.com

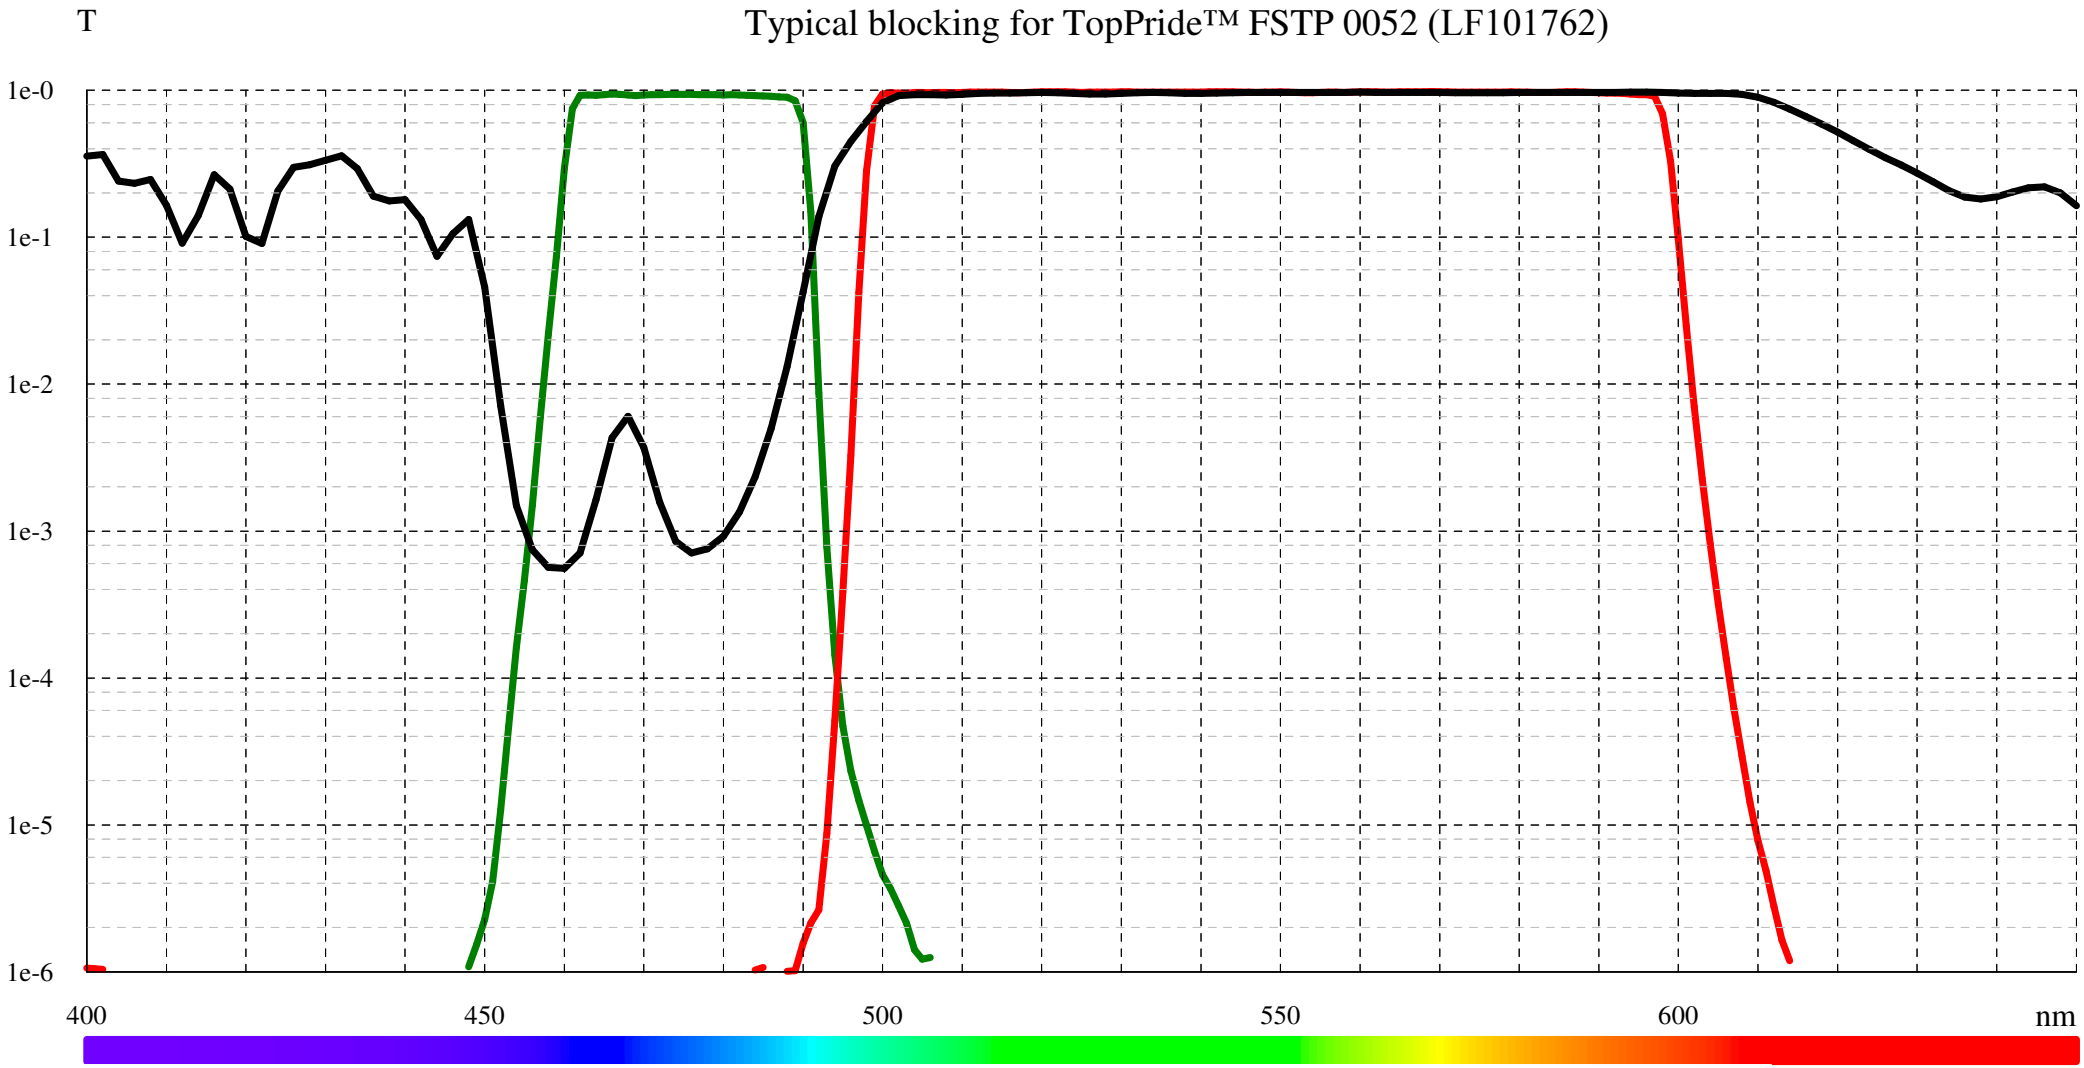

TopPride™ filtersets feature:

- Single substrate construction
- No colored glass (minimal lens effect, extreme durability and minimal auto fluorescence).
- Ultra Hard Coated filters using oxide materials
- Typical transmission of 95-98% (minimum 92%)
- The upper limit of the blocking range is 950nm to better suit modern camera based microscopes

delta
optical thin film

Delta Optical Thin Film A/S, Venlighedsvej 4, 2970 Hørsholm, Denmark Phone +45 7070 7146 e-mail: sales@deltaopticalthinfilm.com www.deltaopticalthinfilm.com